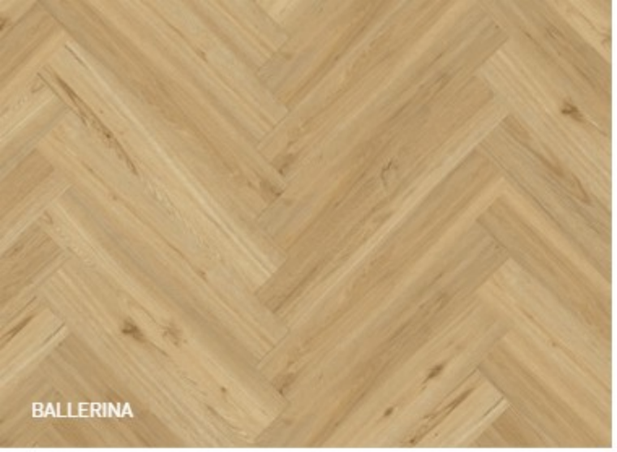



# Creation 55 HB

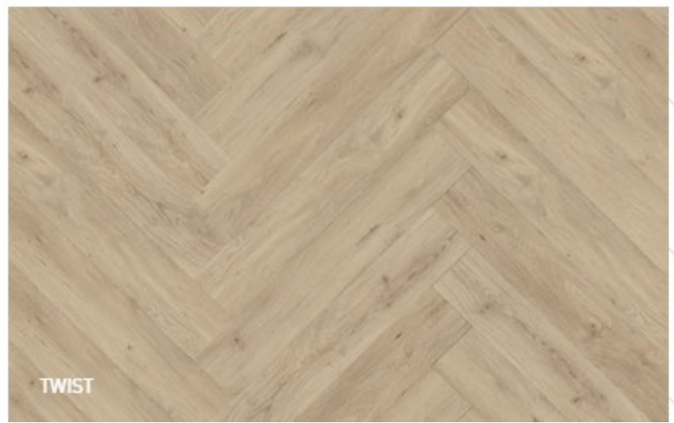
Gerflor®


BALLERINA


QUARTET & QUARTET FAUVE


BOSTONIAN OAK BEIGE


QUARTET FAUVE


TWIST

# Creation 55 HB



QUARTET 0503 — **Dry Back** 152 X 762 | **RIGID AC** 125 x 750



QUARTET FAUVE 0859 — **Dry Back** 152 X 762



BALLERINA 0347 — **Dry Back** 152 X 762 | **RIGID AC** 125 x 750



TWIST 0504 — **Dry Back** 152 X 762




BOSTONIAN OAK BEIGE 0853 — **Dry Back** 152 X 762

DESIGN SHADE VARIATION: Light Medium

# Creation 55 HB

gerflor.com / follow us

| | | | Creation 55 HB Dry Back | Creation 55 Rigid Acoustic |
|---|---|---|---|---|
| **DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE** | | | | |
| Total Thickness / Épaisseur totale / Gesamtdicke / Totale dikte / Espesor total / Espessura total / Spessore totale | EN ISO 24346 | mm | 2.50 | 6.00 |
| | ASTM F386-02 | inch | 0.10 | 0.24 |
| Thickness of the wearlayer / Épaisseur couche d'usure / Dicke der Nutzschicht / Dikte van de slijtlaag / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura | EN ISO 24340 | mm | 0.55 | 0.55 |
| | ASTM F410-02 | inch | 0.022 | 0.022 |
| Weight / Poids / Flächengewicht / Gewicht / Peso / Peso / Peso | EN ISO 23997 | g/m² | 3 850 | 9 480 |
| Size / Format / Afmetingen / Dimensiones / Dimensões /Dimensione<br>Number of planks or tiles per box / Sqm per box - Nombre de lames ou dalles par boîte / m² par boîte - Planken-/Fliesenanzahl pro Karton / m² pro Karton - Aantal tegels/planken per verpakking/ zantal m2 per verpakking - Numero doghe/piastre e m² per scatola - Cantidad de losetas / Caja / Quantidade desmosaicos / Caixa & m² | ISO 24342<br>ASTM F 536 | mm<br>inch | 152 x 762 mm / 33 / 3,82m² | 125 x 750 / 16 / 1.50m² |
| | Number of planks / m² | | | |
| **CLASSIFICATION / CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI** | | | | |
| Norm - Product Specification / Norme - Spécification produit /Produktnorm - Technische eigenschappen / Normas - Norma prodotto | - | - | EN ISO 10582 | EN ISO 10582 |
| | ASTM F 1700-04 | - | Class III Type B | Class III Type B |
| European Classification /Classement européen / Europäische Klassifizierung / Europese classificatie / Clasificación europea / Classificação Europeia / Europea | EN ISO 10874 | class | 33 - 42 | 33 - 42 |
| Fire Rating / Classement Feu / Brandverhalten / Brand classificatie /Fuoco / Fogo / Reazione al fuoco | EN 13 501-1 | class | Bfl-s1 | Bfl-s1 |
| Static Electrical Propensity / Potentiel de charge / Bogehoudladung / Elektrische eigenschappen / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica | EN 1815 | kV | < 2 | < 2 |
| Slip Resistance Wet / Glissance humide / Rutschhemmung / Anti-slip /Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida[1] | DIN 51130 / BGR 181 | class | R10 | R10 |
| **PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / CARATTERISTICHE TECNICHE** | | | | |
| Wear Resistance / Résistance à l'usure / Verschleißverhalten / Slijtvastheid / Abrasión / Abrasão / Resistenza all'abrasione | EN 660.2 | mm³ | < 2.0 | < 2.0 |
| Wear Group / Groupe d'abrasion / Verschleißgruppe / Groep slijtvastheid / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione | QB 30 | group | T | T |
| Type Binder content / Teneur en agent liant / Bindemittelgehalt / Contenido en ligante / Conteúdo em ligante en agent | ISO 10582 | group | I | I |
| Dimensional stability (norm) / Stabilité dimensionnelle (norme) / Maßstabilität (norm) / Maatvastheid (norm) / Estabilidad Dimensional (Exigencia) / Estabilidade dimensional (normalização) / Stabilità dimensionale (requisito normativo) | EN ISO 23999 | % | < 0.25 | < 0.15 |
| Dimensional stability (average measured value) / Stabilité dimensionnelle (valeur moyenne mesurée) / Maßstabilität (Durchschnittsmesswert) / Maatvastheid (gemeten gemiddelde waarde) / Estabilidad Dimensional (Valor medio) / Estabilidad Dimensional (Valor medio) / Stabilità dimensionale (rilevata) | - | % | < 0.10 | < 0.10 |
| Residual Indentation / Poinçonnement statique rémanent / Restindruck / Indrukbelasting / Punzonamiento / Punçoamento / Impronta | EN ISO 24343-1 | mm | < 0.10 | < 0.05 |
| Impact sound insulation / Isolation acoustique bruits de chocs / Trittschallverbesserungsmaß / Geluidsisolatie / Acústica / Isolamento acústico | EN ISO 717-2 | dB | 4 | 19 |
| Room Impact / Sonorité à la marche / Raumschall / Loopgeluid / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar | NF S 31074 | dB | 77 | 81 |
| Castor chair test / Essai de la chaise à roulettes / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed | ISO 4918 | - | OK | OK |
| Thermal Conductivity / Conductivité thermique / Wärmeleitfähigkeit / Thermische weerstand / Conductividad térmica / Contutividade térmica / Resistenza termica / Varmeledningsmotstånd / Varmemostand | EN ISO 10456 | W/(m.K) | 0.25 | 0.25 |
| Colour Fastness / Solidité lumière / Lichtechtheit / Lichtechtheid / Resistencia a la luz / Estabilidade das cores / Solidità alla luce | EN ISO 105 - B02 | Degree | > 6 | > 6 |
| Surface Treatment / Traitement de surface / Oberflächenvergütung / Oppervlaktebehandeling / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie | - | - | ProtecShield® | ProtecShield® |
| Chemical Products Resistance / Résistance aux produits chimiques / Verhalten gegenüber Chemikalien (2) / Chemische bestendigheid / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici | EN ISO 26987 | - | OK | OK |
| **ENVIRONMENT/INDOOR AIR QUALITY / QUALITE DE L'AIR INTERIEUR / UMWELT/RAUMLUFTQUALITÄT / AMBIENTE/QUALIDADE DO AR INTERIORENVIRONNEMENT/ MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIOAMBIENTE/QUALIDADE DO AR INTERIOR** | | | | |
| TVOC after 28 days / TVOC après 28 jours / TVOC (28 Tage) / TVOC (28 dagen) / TVOC (28 días) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dagar) | ISO 16000-6 | µ/m² | < 10 | < 10 |
| Certification /Zeugnis / Certificado / Certificação | - | - | Floorscore® | Floorscore® |
| **CE MARKING / MARQUAGE CE / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA** | | | | |
| CE | EN 14041 | - |  | |

(1) Plan incliné avec huile / Ramp test with oil / Schiefe Ebene
(2) Beständig gegenuber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Satüren und Laugen bei kurzzeitiger Einwirkung.

**IMPORTANT:** The information contained in this document is valid from 01/11/2022 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

## we care / we act Our Commitments for a Sustainable future

**CARBON FOOTPRINT*** -20 % kg $CO_2$ equivalent/m² between 2020 and 2025

**BIOSOURCED CONTENT**** 10 % by 2025

**RECYCLED CONTENT** 30 % by 2025

**ADHESIVE FREE***** 35 % by 2025

**ANNUAL VOLUME RECYCLED** 60 000 t by 2025

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution

RC Lyon B 726 580 152 - jpe - Non contractual imagery - 11/2022

Cover: Ballerina